



FGM-62 Carbon / FGM-170 Carbon  
Floor Stand Mic with Carbon Boom

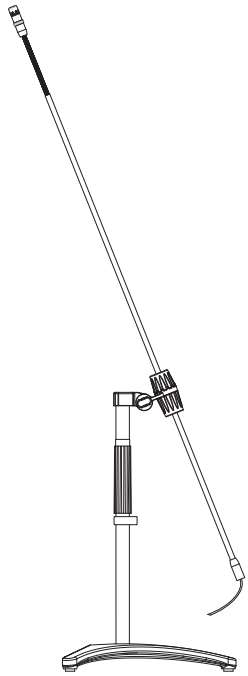

FGM-62 Carbon / FGM-170 Carbon

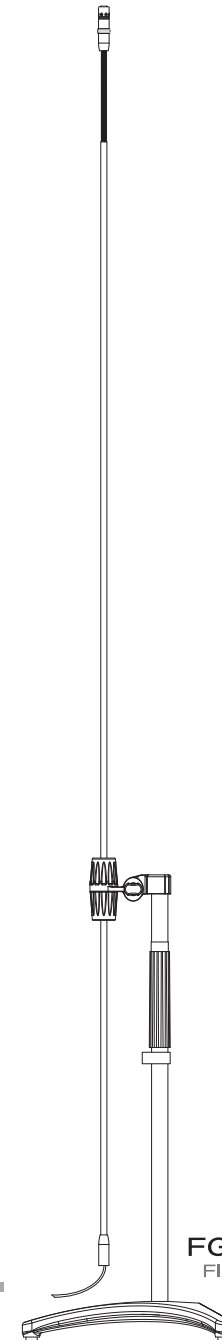

FGM-62 Carbon / FGM-170 Carbon  
Floor Stand Mic with Carbon Boom

# FGM-62 Carbon / FGM-170 Carbon

## Floor Stand Mic with Carbon Boom

Thanks for choosing JTS FGM-62 Carbon / FGM-170 Carbon floor stand mic with carbon boom. In order to obtain the best efficiency, you are recommended to read this manual before applying.

### Features




- FGM Series has the same capsules as GML series: omni-directional (GML-O), cardioid (GML-C) and supercardioid (GML-S) capsule module.
- Bundled with interchangeable microphone heads provide great convenience in replacing and repairing.
- -10dB pad and Low-Cut switches are provided for easy installation
- Mic-On LED indicates the working status.
- The very light carbon boom makes remote miking an easy job.
- FGM-170 Carbon: with mic stand height 170 cm, the rest is identical to FGM-62.

### Application:

- Choirs
- Presentation
- Also as normal mic stand

### Parts Identification

- ① Interchangeable Capsule
- ② Carbon Boom
- ③ Floor Stand and Base
- ④ Cable Guide

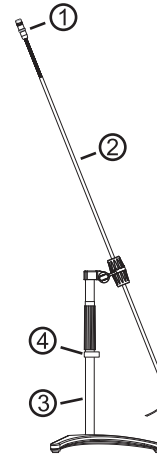

### Accessories



- Windscreen
- Interchangeable Capsules in Wooden Box (Supercardioid and Omnidirectional)





### Specification

- Type: Back Electret Condenser
- Frequency Response: 50 to 18,000 Hz
- Polar Pattern: Cardioid, Supercardioid, Omnidirectional
- Sensitivity (at 1,000 Hz):  $-56 \pm 3\text{dB}$  ( $1.58\text{mV}$ )  $0\text{dB}=1\text{V}/\mu\text{bar}$
- Impedance:  $220\Omega$
- MAX. SPL FOR 1%THD: 125dB
- Connector: 3P mini XLR (M)
- Cable Connector: Input: 3P mini XLR (F)  
Output: 3P XLR (M) power module
- Power Supply: 9-52 VDC phantom power (LED standard operation voltage 48V)
- Length: 1450 mm
- Cable Length: 8 meters



### GML-C

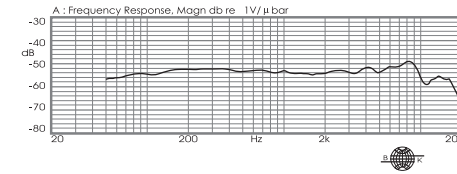

### GML-S

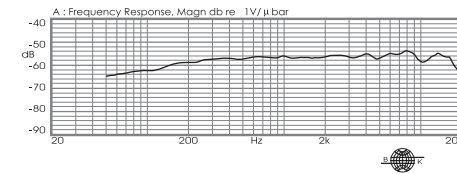

### GML-O

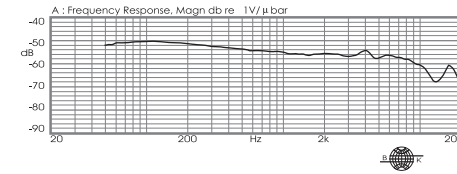

### Dimensions

